


iPhone Dock - MagSafe Installation

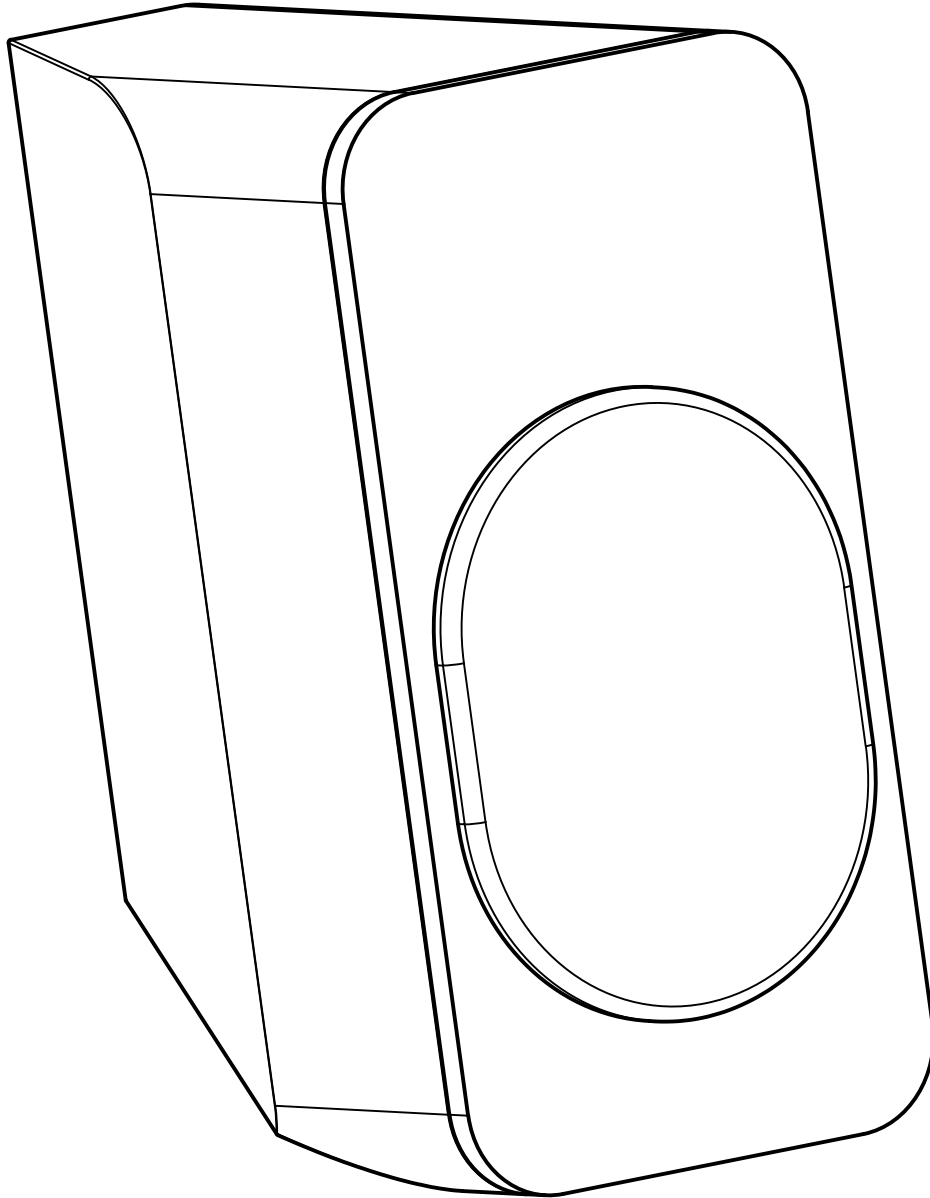

O O O
ODD ONE OUT


iPhone Dock - MagSafe Installation

Please read through all of the instructions before installing your MagSafe charger into the iPhone Dock.

The MagSafe charger is held in place by four magnets. It can be removed or repositioned when needed.


These instructions show how to remove the cover, position the charger, route its cable, and refit the cover.

-
- 1. Carefully remove the cover to access the inside of the dock. Hold the outer edges and avoid pressing on the thin center section.**
-

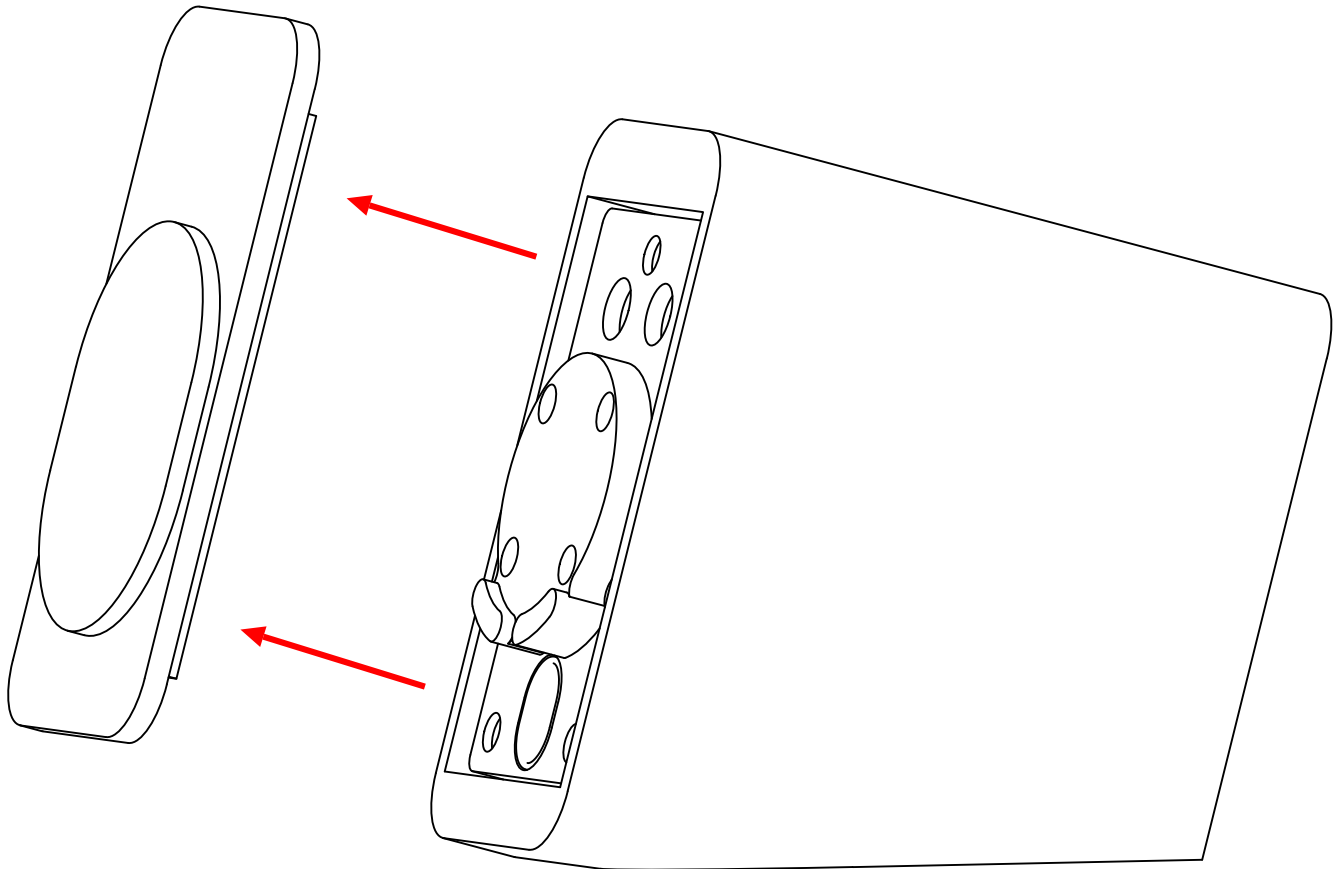

iPhone Dock - MagSafe Installation

2. Feed the MagSafe charger's cable through the port at the bottom of the dock.
-

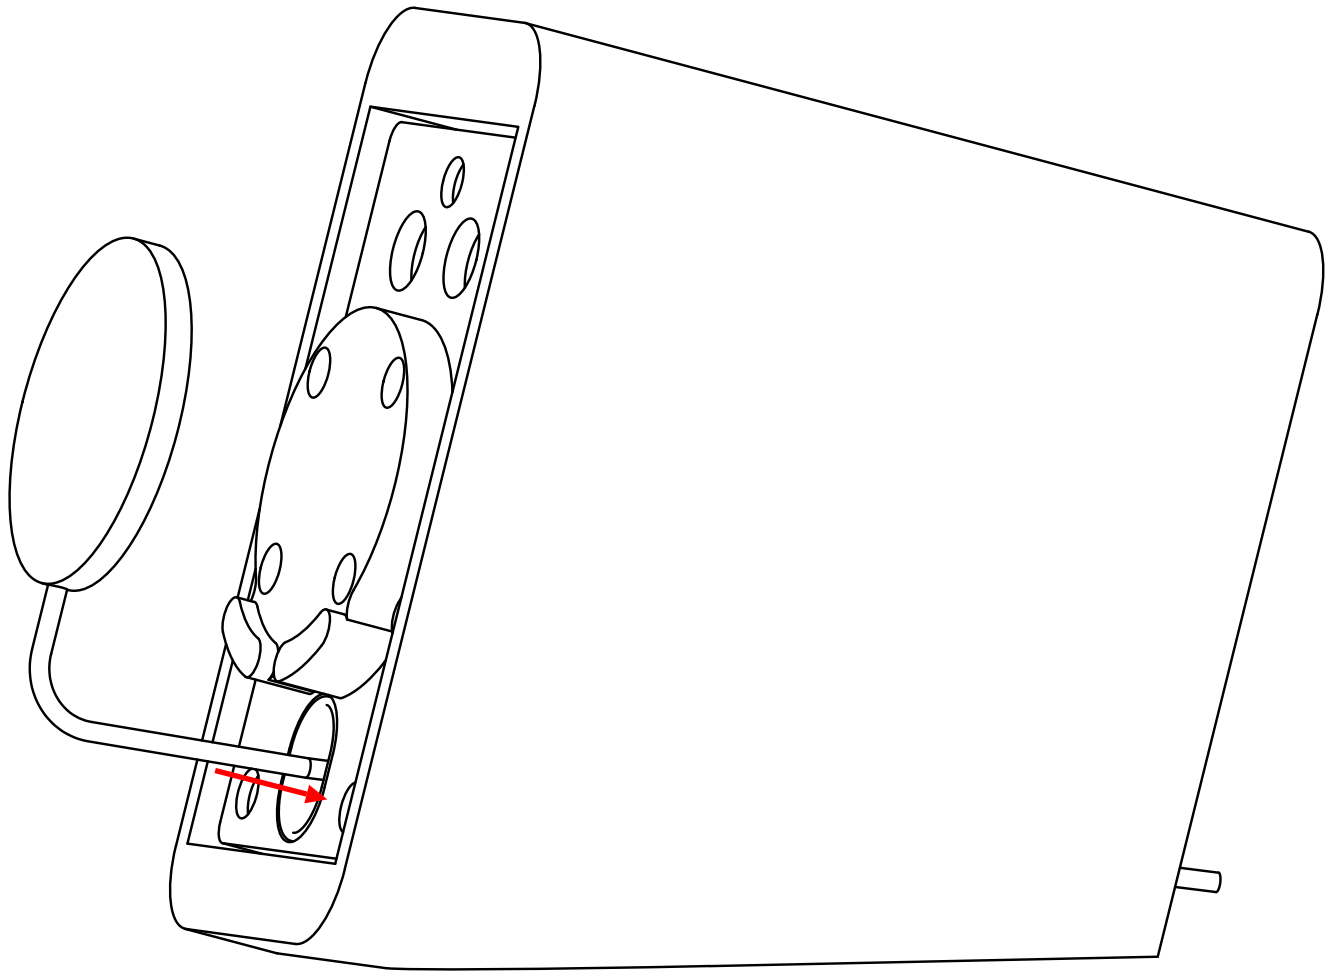

iPhone Dock - MagSafe Installation

3. The two bean-shaped posts position the MagSafe charger. (Fig 1)

The four magnets hold the MagSafe charger in place.

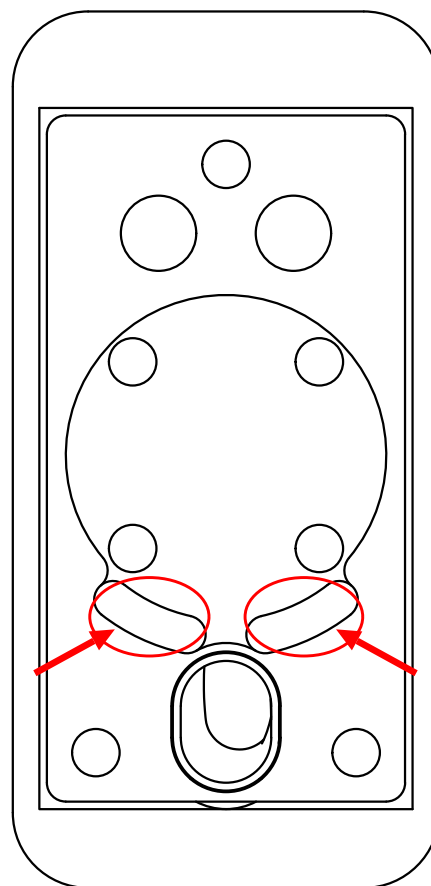


Fig 1

-
4. Seat the MagSafe charger on the two posts, with its cable between them. Let it settle flat against the magnets. (Fig 2)

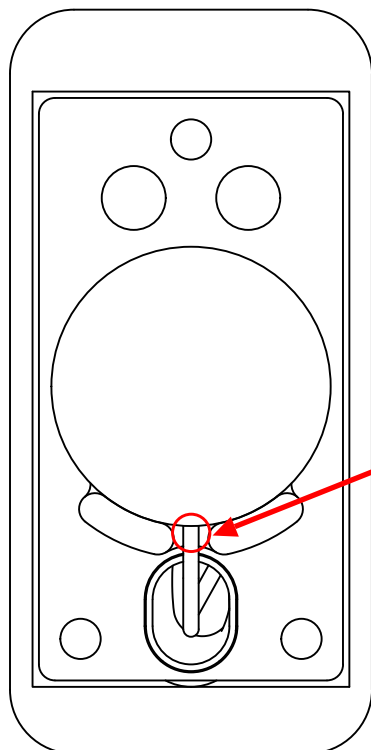


Fig 2

iPhone Dock - MagSafe Installation

5. The cover's raised center is thin to allow charging through it. Handle this area carefully while the cover is off. (Fig 3)

With the charger seated, carefully fit the cover onto the dock. Apply pressure only to the green areas; avoid the red center section. (Fig 4)

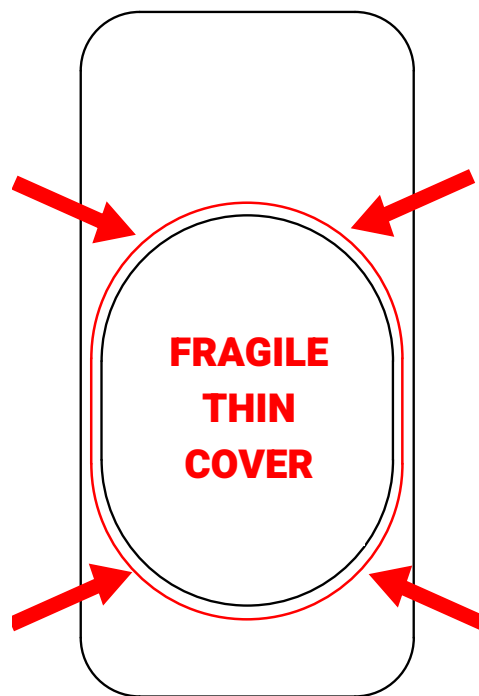


Fig 3

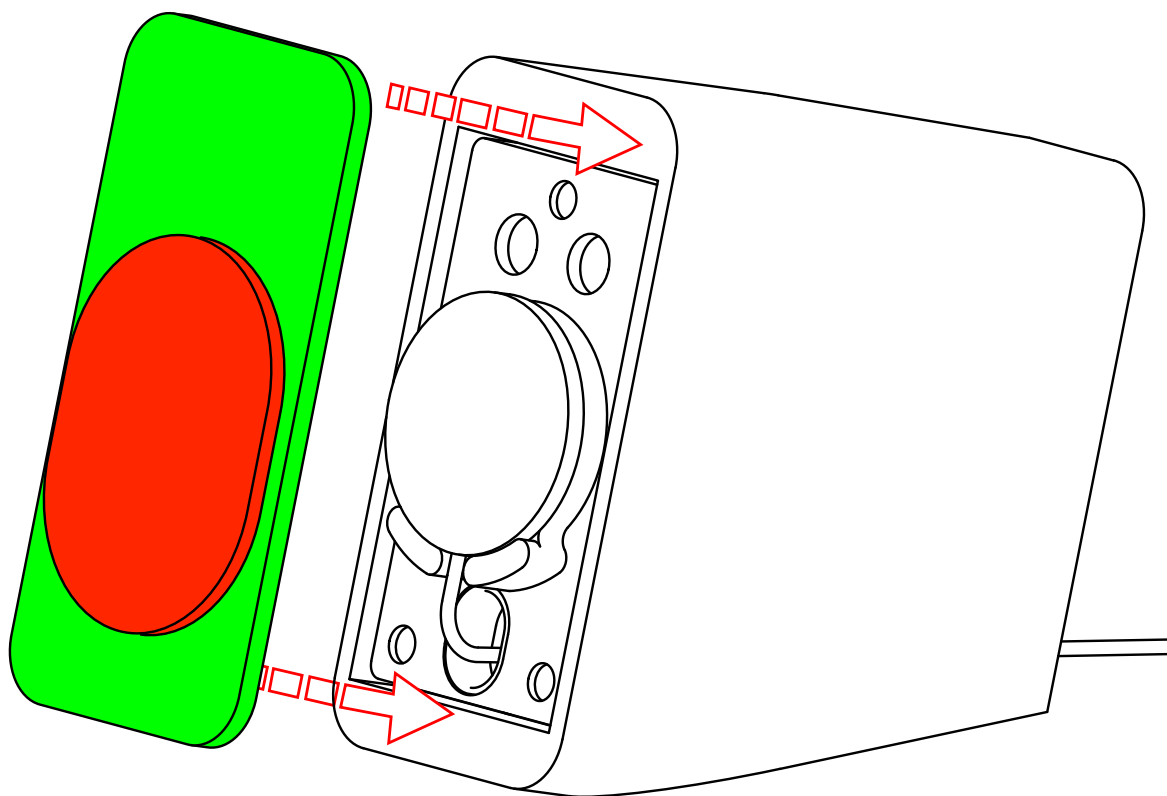


Fig 4